

Centurydrain® ... the best looking building material in the country

or the suburbs, for that matter. Centurydrain makes a building tough enough for just about any rural application, yet its clean, sharp profile and crisp colors transform virtually any structure—even commercial, light industrial, and residential—into a genuine showplace.


Centurydrain is packed with the kinds of features you want: rugged, full hard 100,000-plus psi high tensile galvanized steel, the most efficient drain channel on the market; super tight fitting side laps; and colors that will stay bright and chalk-free well into the next century. Put up Centurydrain and you've put up a handsome, cost efficient structure that will stay tight, dry, and durable enough to weather season after season of punishing wind, rain, snow, and sun.

Centurydrain is part of The System

Centurydrain's enhanced performance is a product of The System: the most tightly quality-coordinated manufacturing and paint finishing process in the industry. Every step—from 100 percent Wheeling-Pittsburgh galvanized steel through roll forming—is engineered to deliver roofing and siding with increased durability, a superior finish, and greater value. Value spelled out in a rock-solid performance certification.



NOTE: Colors are as close as possible to the actual colors.

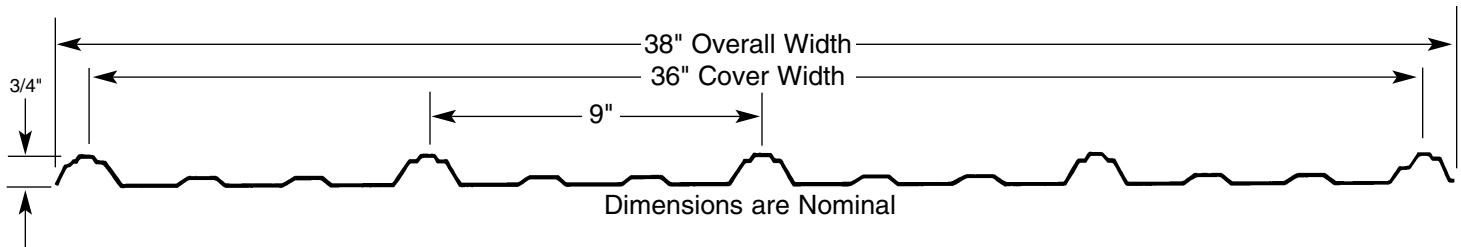

Centurydrain quick specs

- Full-hard 100,000-plus psi galvanized steel.
- Popular 38" width (36" cover), in lengths from 6 thru 40 feet, in even one inch increments.
- Available in galvanized G-90 and fourteen rich, baked-on enamel colors.
- Three quarter inch major ribs on 9" centers along with prominent intermediate ribs to provide strength, snug fit and clean lines.
- 29 gauge (28 and 26 on special order).
- Also available: 2 oz. Seal of Quality—a sheet that is heavier and with an extra thick zinc coating for extra wear and long life. We're so confident of its durability, we provide 2 oz. Centurydrain with its own 20 year limited warranty.

Allowable Uniform Load Table (Lbs. Per Sq. Ft.)


Purlin Spacing	24"	30"	36"	42"	48"	54"
Triple Span	191	122	85	60	40	28

NOTES:

1. Material is produced from steel with a minimum yield strength of 80 K.S.I.
2. Centurydrain physical properties were determined based on physical tests conducted in accord with the ASTM E1592 and AISI Cold Formed Steel Design Manual Procedures.
3. Values for stress are based on $M = \frac{wL^2}{10} \times 12$ (L is in feet)
4. Loads to the right of the heavy line are governed by deflection and based on $D \text{ max.} = \frac{0.00688 wL^4}{EI} \times 1728$ with D max. at $L/100$.
5. Values are for total allowable uniform loads in PSF.

Wheeling Corrugating Company reserves the right to change the design and/or specifications of its products without notice.

Advanced Product Design

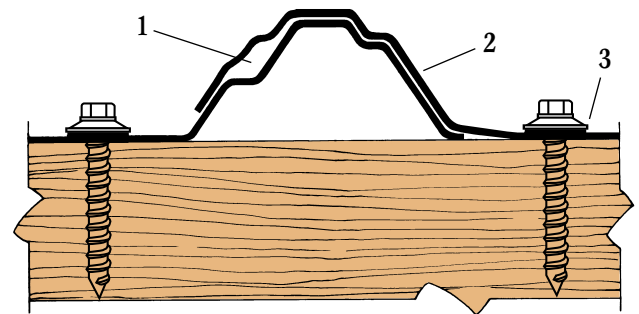

1. Drain channel: exclusive leakproof drain channel guards against wind, rain, and snow, adds strength to each joint; prevents capillary action; stays weathertight; interiors stay dry, snug.
2. Special crisp, clean rib shape: incorporates steep angles in a new design feature that translates to extraordinary strength and leak protection.
3. Wide, flat surface allows easy centering, quick fastening.



WC-SC950B E03-GLP-15M



Wheeling Corrugating

Toll free telephone: 877-333-0900 • Toll free fax: 888-786-8707
www.wheelingcorrugating.com

